D.) FLASHING PATTERN LIST

Single-color module

1. Random
2. Steady On
3. High Flash
4. Single_fast
5. Dual_slow
6. Dual_fast
7. Triple _slow
8. Triple _fast
9. Quad_slow
10. Quad_fast
11. EU-Quad 1
12. EU-Quad 2
13. Single combo
14. Dual combo
15. Triple combo
16. Attack 1
17. Attack 2

Dual-color module

Color 1

1. Color 1 Steady On
3. Color 1 Single
5. Color 1 Double
7. Color 1 Triple
9. Color 1 Quad
11. Color 1 EU-Quad

Color 2

2. Color 2 Steady On
4. Color 2 Single
6. Color 2 Double
8. Color 2 Triple
10. Color 2 Quad
12. Color 2 EU-Quad

Color 1&2


13. Color 1&2 Single
14. Color 1&2 Double
15. Color 1&2 Triple
16. Extreme Action flash
17. Extreme warp flash
18. Random

E.) WIRING EXAMPLES & INSTRUCTIONS


NOTE:

1. Light in master mode "Sync " with light in master mode.
2. Light in master mode "Alternately" with light in slave mode.
3. Light in slave mode "Sync" with light in slave mode.
4. Must change the mode befor Yellow wire connection together.
5. Either "Sync" or "Alternately" must be in the same Flash Pattern.
Can used Yellow wire to reset the flash, than two or more lights be in same Flash Pattern.
6. In Wiring one, Switch 2 coved with Switch 1.

Wiring one:

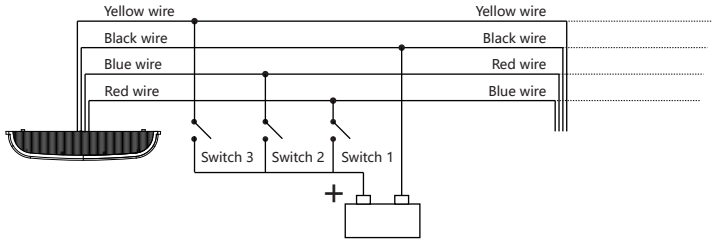


Wiring two:

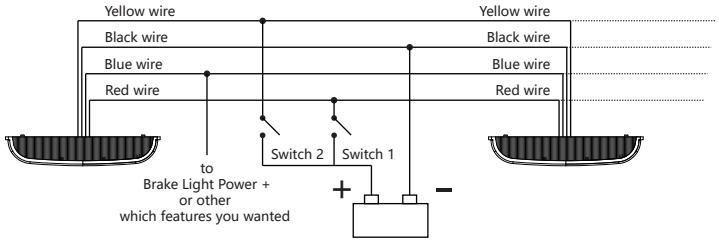


Installation and Operational Guide

A.) MOUNTING DIAGRAM

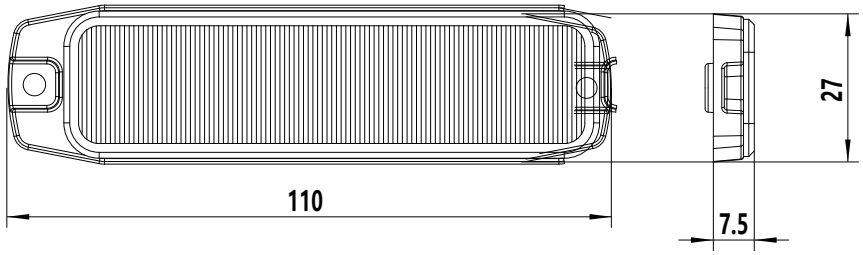

B.) WIRING DIAGRAM

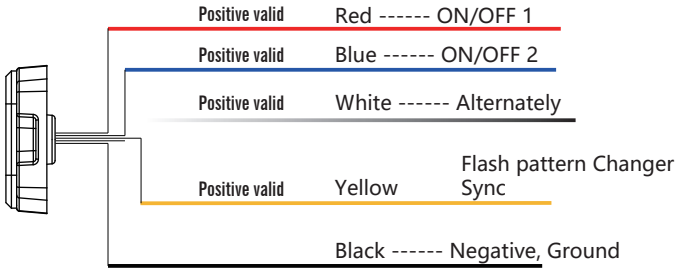

C.) FUNCTION

1). Activate the lighthead
The Red (+) or Blue (+) wire to Positive and the black (-) wire to Negative
Please note that ON/OFF 2 over rides ON/OFF 1.

2). Brake or Turn
White wire can worked when power on (RED or Blue wire is power wire).

3). Flash pattern changer
Momentarily connect the Yellow wire to Positive to cycle through the 17 flash patterns.

4). Master & Slave mode
Connect the Yellow wire to Positive more than 3 second to cycle through master or slave mode. If time more than 6 second, the Flash pattern will be Reset to Flash 1 pattern.
Note: master mode color 1 bright. slave mode color 2 bright.

5). Sync or Alternate (two or more lightheads)
Connected the Yellow wire together and all light flash in the same pattern.
Synchronization: **Master** <---> **Master**
Slave <---> **Slave**
Alternate: **Master** <---> **Slave**

Manual: 20200901