D.) FLASHING PATTERN LIST

Color 1 alone		Color 2 alone	
1. Color 1 Steady On	6. Color 1 Double_Fast	11. Color 2 Steady On	16. Color 2 Double_Fast
2. Color 1 Single_Slow	7. Color 1 Double_Combo	12. Color 2 Single_Slow	17. Color 2 Double_Combo
3. Color 1 Single_Fast	8. Color 1 Triple _Slow	13. Color 2 Single_Fast	18. Color 2 Triple _Slow
4. Color 1 Single_Combo	9. Color 1 Triple _Fast	14. Color 2 Single_Combo	19. Color 2 Triple _Fast
5. Color 1 Double_Slow	10. Color 1 Triple _Combo	15. Color 2 Double_Slow	20. Color 2 Triple _Combo


ALL (color 1&2)	21. Color 1&2 Single_Slow	30. Color 1&2 Single_Slow_offtime
	22. Color 1&2 Single_Fast	31. Color 1&2 Single_Fast_offtime
	23. Color 1&2 Single_Combo	32. Color 1&2 Single_Combo_offtime
	24. Color 1&2 Double_Slow	33. Color 1&2 Double_Slow_offtime
	25. Color 1&2 Double_Fast	34. Color 1&2 Double_Fast_offtime
	26. Color 1&2 Double_Combo	35. Color 1&2 Double_Combo_offtime
	27. Color 1&2 Triple _Slow	36. Color 1&2 Triple _Slow_offtime
	28. Color 1&2 Triple _Fast	37. Color 1&2 Triple _Fast_offtime
	29. Color 1&2 Triple _Combo	38. Color 1&2 Triple _Combo_offtime

E.) WIRING EXAMPLES & INSTRUCTIONS


NOTE:

1. Light in master mode "Sync " with light in master mode.
2. Light in master mode "Alternately" with light in slave mode.
3. Light in slave mode "Sync" with light in slave mode.
4. Must change the mode befor Yellow wire connection together.
5. Either "Sync" or "Alternately" must be in the same Flash Pattern.
Can used Yellow wire to reset the flash, than two or more lights be in same Flash Pattern.
6. In Wiring one, Switch 2 coved with Switch 1.

Wiring one:

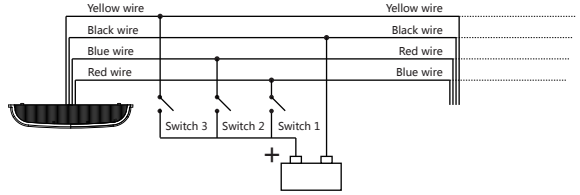


Wiring two:

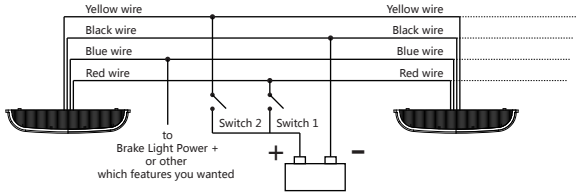


Installation and Operational Guide

A.) MOUNTING DIAGRAM

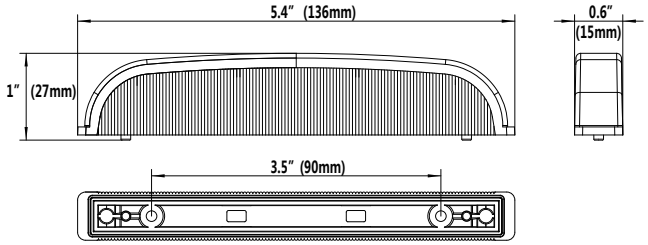

B.) WIRING DIAGRAM

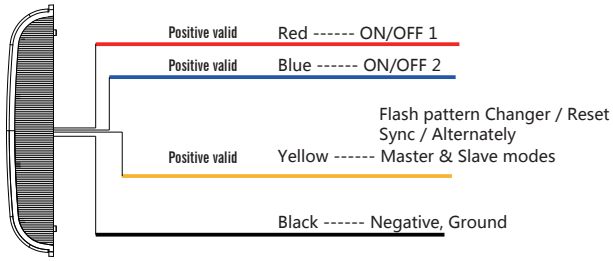

C.) FUNCTION

1). Activate the lighthead
The Red (+) or Blue (+) wire to Positive and the black (-) wire to Negative
Please note that ON/OFF 2 over rides ON/OFF 1.

2). Brake or Turn
White wire can worked when power on (RED or Blue wire is power wire).

3). Flash pattern changer
Momentarily connect the Yellow wire to Positive to cycle through the 17 flash patterns.

4). Master & Slave mode
Connect the Yellow wire to Positive more than 3 second to cycle through master or slave mode. If time more than 6 second, the Flash pattern will be Reset to Flash 1 pattern.
Note: master mode color 1 bright. slave mode color 2 bright.

5). Sync or Alternate (two or more lightheads)
Connected the Yellow wire together and all light flash in the same pattern.
Synchronization: **Master** <---> **Master**
Slave <---> **Slave**
Alternate: **Master** <---> **Slave**

Manual: 20200901