D.) FLASHING PATTERN LIST

Single-color module

1. Random	10.Quad_fast
2. Steady On	11. EU-Quad 1
3. High Flash	12. EU-Quad 2
4. Single_fast	13. Single combo
5. Dual_slow	14. Dual combo
6. Dual_fast	15. Triple combo
7. Triple _slow	16. Attack 1
8. Triple _fast	17. Attack 2
9. Quad_slow	

Dual-color module

Color 1	Color 2
1. Color 1 Steady On	2. Color 2 Steady On
3. Color 1 Single	4. Color 2 Single
5. Color 1 Double	6. Color 2 Double
7. Color 1 Triple	8. Color 2 Triple
9. Color 1 Quad	10. Color 2 Quad
11. Color 1 EU-Quad	12. Color 2 EU-Quad

Color 1&2


13. Color 1&2 Single	17. Extreme warp flash
14. Color 1&2 Double	18. Random
15. Color 1&2 Triple	
16. Extreme Action flash	

E.) WIRING EXAMPLES & INSTRUCTIONS


NOTE:

1. Light in master mode "Sync " with light in master mode.
2. Light in master mode "Alternately" with light in slave mode.
3. Light in slave mode "Sync" with light in slave mode.
4. Must change the mode befor Yellow wire connection together.
5. Either "Sync" or "Alternately" must be in the same Flash Pattern.
Can used Yellow wire to reset the flash, than two or more lights be in same Flash Pattern.
6. In Wiring one, Switch 2 coved with Switch 1.

Wiring one:

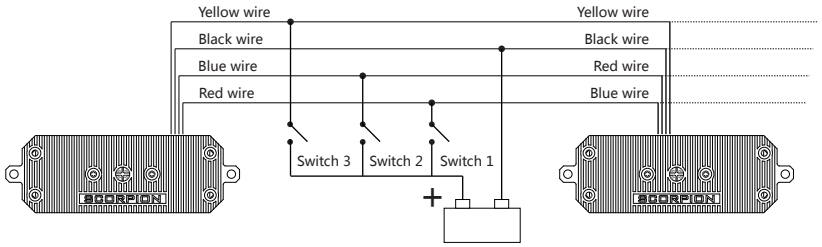


Wiring two:

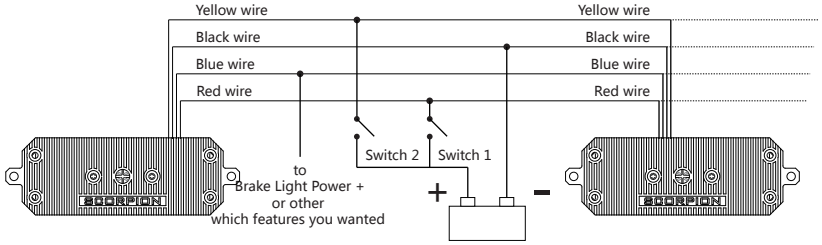


Installation and Operational Guide

A.) MOUNTING DIAGRAM (mm)

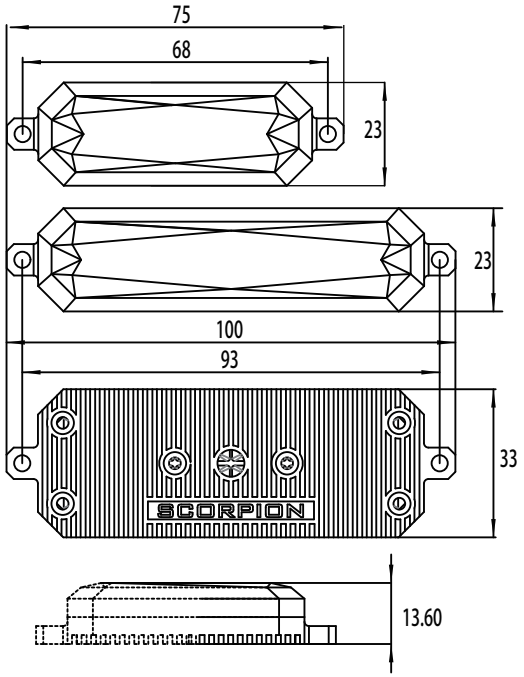

B.) WIRING DIAGRAM

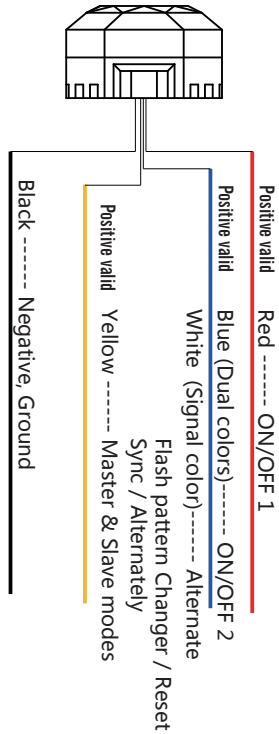

C.) FUNCTION

1). Activate the lighthead (Single color unit not have Blue Wite)
The Red (+) or Blue (+) wire to Positive and the black (-) wire to Negative
Please note that ON/OFF 2 over rides ON/OFF 1.

2). Brake or Turn (if have it)
White wire can worked when power on (RED or Blue wire is power wire).

3). Flash pattern changer
Momentarily connect the Yellow wire to Positive to cycle through patterns as the table.

4). Master & Slave mode (only Dual colors unit)
Connect the Yellow wire to Positive more than 3 second to cycle through master or slave mode. If time more than 6 second, the Flash pattern will be Reset to Flash 1 pattern.
Note: master mode color 1 bright. slave mode color 2 bright.

5). Sync or Alternate (two or more lightheads)
Connected the Yellow wire together and all light flash in the same pattern.

Dual Colors		Single Color	
Synchronization:	**Master** <---> **Master** **Slave** <---> **Slave**	Synchronization:	**White wire +** <---> **White wire +** **White wire unconnected** <---> **White wire unconnected**
Alternate:	**Master** <---> **Slave**	Alternate:	**White wire +** <---> **White wire unconnected**

Manual: 20230228