
G-EXTREME


LED Grill Lighthead

E. info@911strobelight.com W. www.911strobelight.com


Installation and Operational Guide

A.) MOUNTING DIAGRAM

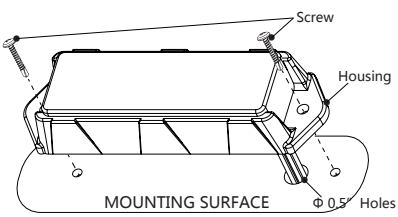



B.) WIRING DIAGRAM



1). Activate the lighthead
The Red (+) or Blue (+) wire to a 12V post. and the black (-) wire to ground post of the vehicle's battery. Please note that ON/OFF 2 over rides ON/OFF 1.

2). Flash pattern changer
Momentarily connect the Yellow wire to the +12V post to cycle through the 15 flash patterns.

3). Set master & slave mode
Connect the Yellow wire to the +12V post more than 3 second, the master or slave mode will changed. If the color 1 light that in master mode, if the color 2 light that in slave mode.

4). Sync or Alternate (two or more lightheads)
Check each lighthead in the same flash pattern. Connected the same color of wires together. Activate the lighthead that in same mode lightheads are Synchronization, in different mode lightheads are alternate.

C.) FUNCTION:

Single-color module

0. Steady On
1. Single Slow
2. Single Fast
3. Double Slow
4. Double Fast
5. Triple Slow
6. Triple Fast
7. Quad Slow
8. Quad Fast
9. Extreme Action Flash
10. Extreme Warp Flash

Dual-color module

Color 1	Color 2	Color 1&2
1. Color 1 Steady On	2. Color 2 Steady On	11. Color 1&2 Single
3. Color 1 Single	4. Color 2 Single	12. Color 1&2 Double
5. Color 1 Double	6. Color 2 Double	13. Color 1&2 Triple
7. Color 1 Triple	8. Color 2 Triple	14. Extreme Action flash
9. Color 1 Quad	10. Color 2 Quad	15. Extreme warp flash